

C3200/C1500

MANUAL AND POWER REWIND STORAGE REELS


For storage only. No live connections.

Series C3200

- 4-1/2" x 4-1/2" (114.3 mm x 114.3 mm) drum opening.
- Disc rewind or optional removable direct crank rewind.
- Spring actuated pin lock.

Series C1500

- 1-1/8" x 2-3/8" (28.6 mm x 60.3 mm) drum opening.
- Direct crank is permanently attached.
- Removable crank optional.
- Also available chain and sprocket rewind powered by electric, compressed air or hydraulic motor.
- Spring actuated pin lock.
- Adjustable Cam-lock drag brake.
- Consult factory for other brakes or locking devices.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Divider discs are available, specify spacing of discs.
- Consult factory for other drum diameters.
- Note: larger drum diameter reduces reel capacity.

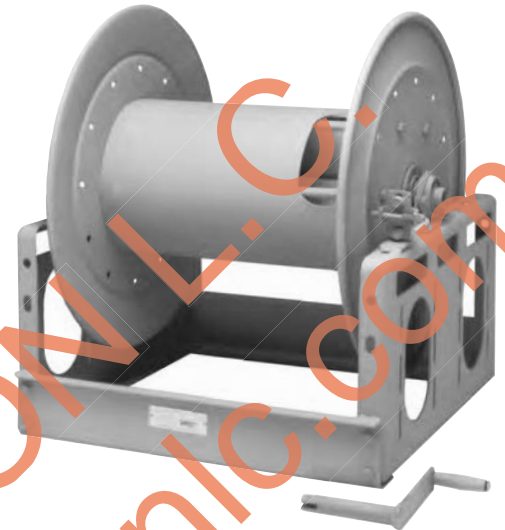

Series C3200
Standard Configuration shown

Shown with
Optional
Crank Handle



Series C1500
Standard Configuration shown



Series C1500
Shown with Optional Slotted Divider Disc

C3200/C1500

Parts Drawing: Series C3200 – ISO 117; Series C1500 – ISO 179

Model Number	Cable Capacity of Reel feet m.				Approx. Weight Crank Rewind ⁴ lb. kg.		Reel Dimensions ^{***} inches mm.										
	O.D. (in) O.D. (mm)	1/4" 6	1/2" 13	3/4" 19	1" 25	NET	SHIP	A	B	C	E CRANK	F PWR	F CRANK	F PWR	G	H	X
C3216-25-26	-	-	-	350 107	150 46	81 37	123 56	13 330	7.5 191	10.5 267	24.75 629	-	20 508	-	27.88 708	15.5 394	7.75 197
C3218-25-26	-	-	-	450 137	200 61	85 39	127 58	15 381	9.5 241	10.5 267	24.75 629	-	22 559	-	27.88 708	15.5 394	7 178
C3222-25-26	-	-	-	700 213	300 91	93 42	135 61	19 483	13.5 343	10.5 267	24.75 629	-	26 660	-	27.88 708	15.5 394	11 279
C3230-25-26	-	-	-	500 152	300 91	113 51	155 70	27.5 699	22 559	10.5 267	24.75 629	-	34.5 876	-	27.88 708	15.5 394	19.5 495
C1512-17-18	-	900 274	200 61	-	-	22 10	53* 24	9 229	4 102	6 152	16.5 419	19 483	15.5 394	14.5 368	18.12 460	9.88 251	7.5 191
C1514-17-18	-	1300 369	300 91	-	-	23 10	68* 31	11 279	6 152	6 152	16.5 419	19 483	17.5 445	16.5 419	18.12 460	9.88 251	9.5 241
C1516-17-18	-	-	400 122	-	-	24 11	68* 31	13 330	8 203	6 152	16.5 419	19 483	19.5 495	18.5 470	18.12 460	9.88 251	11.5 292
C1520-17-18	-	-	650 198	-	-	25 11	80* 36	17 432	12 305	6 152	16.5 419	19 483	23.5 597	22.5 572	18.12 460	9.88 251	15.5 394
C1526-17-18	-	-	900 274	-	-	31 14	98* 44	23 584	18 457	6 152	16.5 419	19 483	29.5 749	28.5 724	18.12 460	9.88 251	21.5 546
C1530-17-18	-	-	1000 305	-	-	33 15	110* 50	27 686	22 559	6 152	16.5 419	19 483	33.5 851	32.5 826	18.12 460	9.88 251	25.5 648

Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown.
- Dimensions reflect pressed frames.
- Weights shown in chart for C1500 series are for crank rewind models. Add these amounts for power rewind models.

	Net (lbs.)/kg	Ship (lbs.)/kg
Electric	18/8.2	18/8.2
Hydraulic	15/6.8	15/6.8
Air	15/6.8	15/6.8

- When ordering power rewind models (C1500 only), prefix model number with:
A = Air Rewind E = Electric Rewind HD = Hydraulic Rewind
(Air rewind reels are supplied with control valve and 18" air hose;
12v and 24v DC rewind reels are supplied with switch and solenoid;
115v AC rewind reels are not supplied with switch but can be ordered
separately; hydraulic rewind reels are not supplied with control valve.)
- Series C3200 requires 3-1/2" clearance to remove crank handle.
- Subtract 5" from "F" dimension for disc rewind on C3200 Series.
- Manual rewind available in RT or LB configurations only.
- 9. Be sure to check dimensions and weights prior to ordering.**

* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS ground).

***x,y indicate mounting holes.

